



## APPLICATIONS

Fan forced wall insert heaters are compact heaters for those hard to heat places such as entrance lobbies, security gatehouses, checkout counters etc.

## FEATURES

- Outputs ranging from 1.0kW to 2.0kW
- Suitable for surface or space saving recess mounting
- Three position mounting, giving three airflow options
- Finned tubular steel element
- Auto reset over temperature cut-out
- Beige powder coated finish
- Available at 110V for site and mobile applications
- Optional integral thermostat


## INSTALLATION

The heaters are for horizontal or vertical mounting with top discharge. Clearances to vertical surfaces or floor must be 150mm.

Each unit is supplied for recess mounting. Surface mounting requires the optional surface box (CWD-S).

The heater should be securely fixed.

All electrical connections made by a suitably qualified person in accordance with the latest edition of the IEE Requirements for Electrical Installation (BS7671:2008).

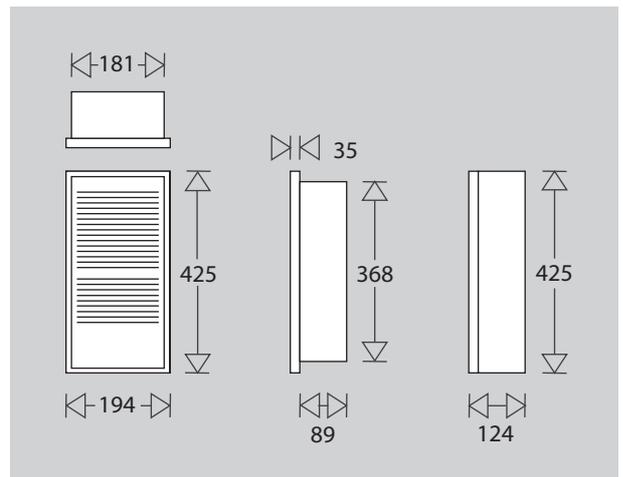

CAT No.	Application Type	kW	Volts	Length mm	Height mm	Depth mm	Weight kgs	Trade Price
<b>CWD-1000</b>	For Recess Mounting	1	230	425	194	124	5	£185
<b>CWD-1001</b>	For Recess Mounting	1	110	425	194	124	5	£185
<b>CWD-1500</b>	For Recess Mounting	1.5	230	425	194	124	5	£195
<b>CWD-1501</b>	For Recess Mounting	1.5	110	425	194	124	5	£195
<b>CWD-2000</b>	For Recess Mounting	2	230	425	194	124	5	£220
<b>CWD-S</b>	Surface mounting box			425	194	124	1.0	£35
<b>CWD-TB</b>	Integral thermostat							£35

Control Options available on page 28