

AIR CURTAIN

Discover the Guard Series Air Curtains, designed for every commercial and industrial need.

From the "plug and play" Guard One, perfect for small entrances, to the robust Guard Pro, ideal for large spaces requiring advanced climate management, our products ensure optimal performance and energy efficiency.

Choose from models with innovative heating options and high air output to maintain comfortable, energy-efficient environments. Elevate your space with Guard Series Air Curtains, where superior design meets sustainability.

GuardOne

new

Air curtain for small entrances



Functions



Plug & Play

- ready to work
- built-in automatics
- power cord and holders included




Motion sensor

- built-in solution
- adjustable range
- on/off switch

Air flow range

(maximum installation height)

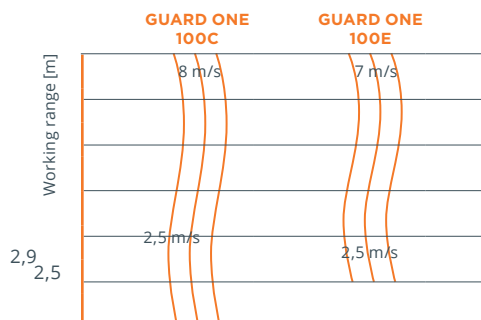

GUARD ONE AIR CURTAIN			
TECHNICAL PARAMETERS		GUARD ONE 100C	GUARD ONE 100E
index		CG0028	CG0029
unit length	m	1,1	1,1
maximum effective range	m	2,9	2,5
heat output	kW	-	3
air output	m ³ /h	1200/1600/2100	1050/1400/1950
sound level	dB A	43/48/56	42/46/56
unit weight	kg	11,7	12,9
power supply parameters V/Hz 230/50	W/A	100/0,7	100/0,7

Automatics



Built-in controls


- motion sensor
- min/max speed
- heater switch (only in E version)



Panel Comfort option (WAA0054N)

- unique SONNIGER design
- min/mid/max speed
- built-in thermostat
- control up to 5 units

Dimensions

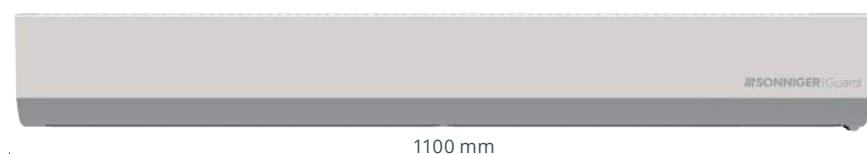

Guard



model 3D

TECHNICAL PARAMETERS		AIR CURTAINS WITH WATER HEATER			AIR CURTAINS WITH ELECTRIC HEATER			AIR CURTAINS WITHOUT HEATER		
		GUARD 100W	GUARD 150W	GUARD 200W	GUARD 100E	GUARD 150E	GUARD 200E	GUARD 100C	GUARD 150C	GUARD 200C
index		CG0019	CG0020	CG0021	CG0022	CG0023	CG0024	CG0025	CG0026	CG0027
unit length	m	1	1,5	2	1	1,5	2	1	1,5	2
effective range	m	4	4	4	4	4	4	4	4	4
heat output range	kW	10-16	20-29	25-40	4 - 7	6,5 - 11	8,5 - 14	-	-	-
max. air output	m³/h	2000	3600	4800	2000	3600	4800	2100	3700	5000
diameter of connection nozzles	"	1/2	1/2	1/2	-	-	-	-	-	-
supply voltage	V/Hz A	230/50 1,4 A	230/50 1,8 A	230/50 2,4 A	3x400/50 14 A	3x400/50 21 A	3x400/50 27,5 A	230/50 1,4 A	230/50 1,8 A	230/50 2,4 A

ACCESSORIES

Magnetic door switch | **DOOR SWITCH (CGA0028)**

Remote control



Panel COMFORT (WAA0054N)

- Unique SONNIGER design
- Manual speed regulation
- Switch-off heating element in the summer season




Panel INTELLIGENT Wi-Fi (WAA0035W)

- Remote control using mobile app
- Manual speed regulation
- Compatible with BMS-MODBUS




HORIZONTAL AIR FLOW RANGE (max range for horizontal installation)

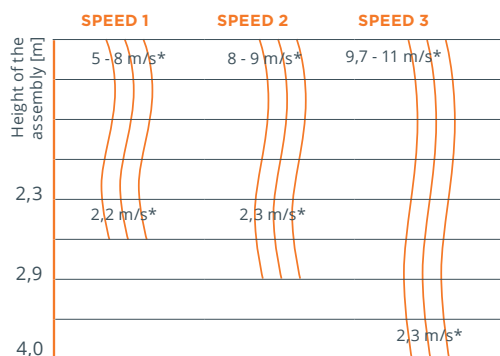

VERTICAL AIR FLOW RANGE (max range for vertical installation)

* air flow speed

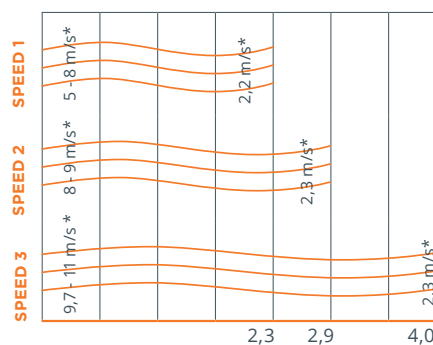

Unit length



Guard Pro

Available
with
EC fan



model 3D

TECHNICAL PARAMETERS		AIR CURTAINS WITH WATER HEATER		AIR CURTAINS WITH ELECTRIC HEATER		AIR CURTAINS WITHOUT HEATER	
		GUARD PRO 150W	GUARD PRO 200W	GUARD PRO 150E	GUARD PRO 200E	GUARD PRO 150C	GUARD PRO 200C
index AC		CGP0023	CGP0024	CGP0032	CGP0033	CGP0025	CGP0026
index EC		CGP0023EC	CGP0024EC	CGP0032EC	CGP0033EC	CGP0025EC	CGP0026EC
unit length	m	1,5	2	1,5	2	1,5	2
effective range	m	8	8	8	8	9	9
heat output range*	kW	33*	47*	14	21	-	-
max. air output	m³/h	6 500	9 100	6 550	9 450	6 700	9 600
diameter of connection nozzles	"	3/4"	3/4"	-	-	-	-
supply voltage	V/Hz A	230/50 2,16 A	230/50 3,24 A	3x400/50 23,5 A	3x400/50 30 A	230/50 2,16 A	230/50 3,24 A

* maximum heat output indicated for 90/70°C water agent temperature and air inlet temperature 0°C.

ACCESSORIES

Multiple units connection | **MULTI 6 (WAA0055)**

Possibility to connect a door switch | **DOORSTOP (CGPA0010)**

Remote
control




Panel COMFORT (WAA0054N)

- Unique SONNIGER design
- Manual speed regulation
- Switch-off heating element in the summer season




Panel INTELLIGENT Wi-Fi (WAA0035W)

- Control units from mobile device
- Switch-off heating element in the summer season
- Compatible with BMS-MODBUS




AIR FLOW RANGE

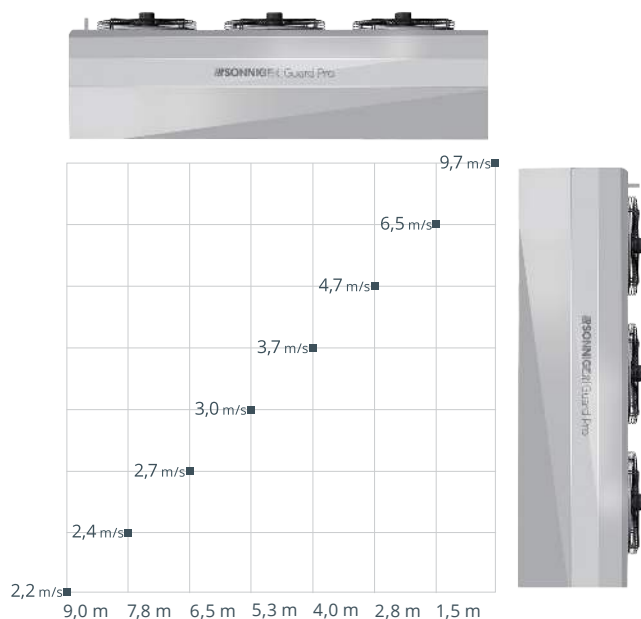

Active Protection system

Active Protection system increases protection efficiency of the entrance gate by heating the lower part of the air barrier.

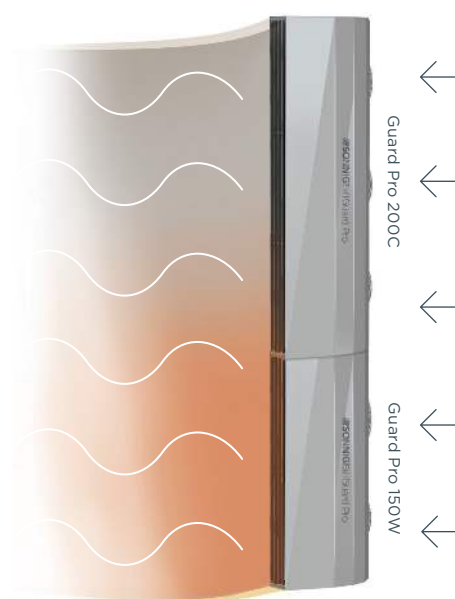

CONTACT US

Website: www.turnbull-scott.co.uk

For technical advice or quotations, one of our friendly technical sales engineers will be happy to help.

Telephone: +44 (0)1450 372 053

Email: info@turnbull-scott.co.uk



Manufacturing Centre:
Unit 1A Burnfoot Industrial Estate
Hawick, Roxburghshire
Scotland, TD9 8SL

Design Hub:
4/1 New Lairdship Yards,
Edinburgh
EH11 3UY